




THE NEW CALIBRATION FOR GAS WARNING SYSTEMS



- Easy exchange
- No specialized company needed
- Available for every gas type
- At guaranteed exchange prices
- No functional test (SIL2 software)

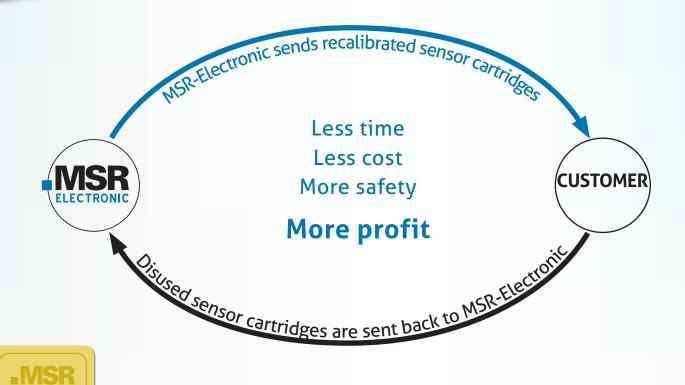





Simply replaceable in a few minutes





Open the housing with a screwdriver (1).

Disconnect the sensor cable and unscrew the sensor head (2).





Exchange the sensor cartridge (3) and conncect the cable of the new sensor head to the PCB (4).

Close cover of the housing with the screws (1).
The recalibrated sensor is ready for use at once.

Real price advantage

The necessary calibration of the sensors has been a complicated procedure so far:

- dependancy on an external certified company
- high expenditure of time and money



The X-CHANGE exchangeable sensor turns the recalibration into a home game:

- delivery of recalibrated sensor cartridges
- easy and independent exchange
- significant time and cost savings



The MSR-Electronic X-Change support guarantees a price based on the consumption of the sensor capacitance. For each uncalibrated sensor returned to MSR-Electronic, you will receive a credit for the unused capacity of the sensor.

For all information and video clips see www.msr-electronic.de/xchange

PERFECT SOLUTIONS FOR GAS ALARM SYSTEMS

MSR Electronic GmbH Würdingerstr. 27 & 27A | 94060 Pocking Germany Fon: +49 8531-9004-0 Fax: +49 8531-9004-44 Mail: info@msr-electronic.de